Additional profit opportunity with these
NEW PRODUCTS IN PLEWS . . .
The Fast Growing High Profit Line.

BE SURE TO SEE . . .

400 series . . . . . page 2
2200 series . . . . . page 3
Soldering Guns . . . . . page 4
Funnels . . . . . page 6

PLEWS oilers

INDUSTRIAL & HARDWARE

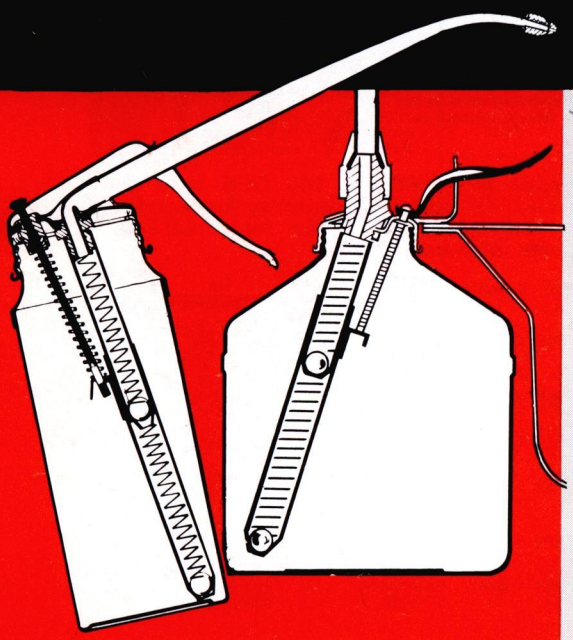

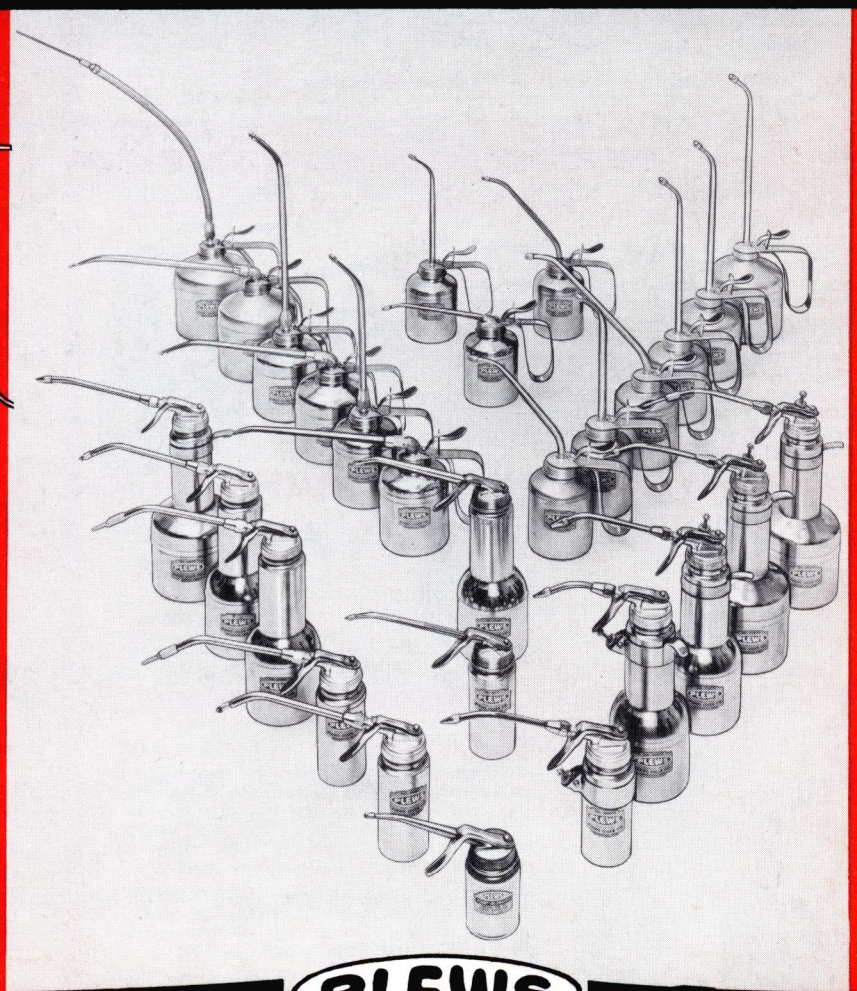

DISTRIBUTED BY

PLEWS

Plews Oiler, Inc. 701 So. 7th St. • Minneapolis 15, Minn.

H 504-R

April 1, 1963

PLEWS...*first choice* OF THE PROFESSIONAL MECHANIC

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS PRODUCTS

PLEWS PISTOL OILERS & HOLDERS

- Fixed Spout – Detachable Tip
- Leakproof drawn bodies
- Comfortable pistol grips
- Powerful, positive pumps, with bronze springs and steel ball valves

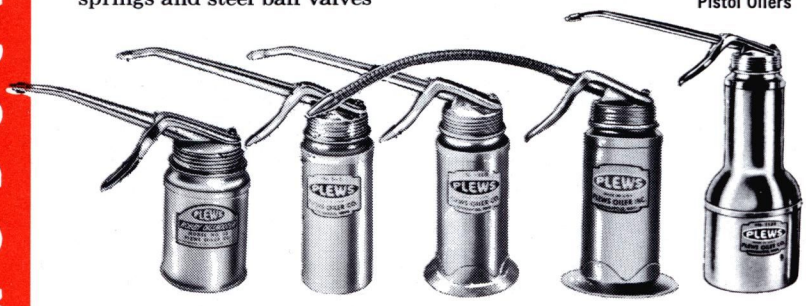

Model	Capacity	Holders	Finish	Package	Shipping Weight per doz.
N-911W	6 oz.	Wall Holder	Nickel	Individual Cartons	8 lbs.
N-911B	6 oz.	Base Holder	Nickel		8 lbs.
N-1105	6 oz.	Base	Copper Lacquer	1 Doz. to Carton	6 lbs.
N-1105F	6 oz.	Base	"		6 lbs.
N-1125	1 pint	None	Nickel	Individual Cartons	12 lbs.
52	4 oz.	None	Nickel	1 Dozen	4 lbs.

PLEWS ADHESIVE GUNS & PUMP APPLICATORS

Plews models 61 and 62 – for standard containers, 61 for the 8 oz., 62 with adapter for the pint. Model 61 is furnished with detachable 4" welded steel spout and detachable adhesive applicator nozzle, unless otherwise specified. Can be supplied with 4" knife blade tip. Model 62 is furnished with detachable 4" steel spout and adhesive applicator nozzle with wire closure. Special purpose tips or nozzles can be furnished at extra cost. Nickel plated.

Model	Capacity	Package	Wt. per Doz.
54	6 oz.	Indiv. Ctn.	8 lbs.
55	1 Pint	Indiv. Ctn.	12 lbs.
61	Fits Stand. 8 oz. Can	None	3½ lbs.
61 R	"	"	"
61 K	"	"	"
62	With Adapter Fits Stand. Pint Can	"	6½ lbs.

PLEWS 400 SERIES

#400 spray gun equipped with an adjustable spray tip with an integral self-cleaning device built into the tip, plus a positive shut-off, produces a fine mist spray with solvents – perfect for applying most sidewall cleaners. One quart capacity.

#401 fine stream high pressure oiler for lubricating and penetrating oils for use on springs, shackles and all hard-to-reach places. 6" spout, one quart capacity.

Both the 400 and the 401 have impervious Teflon valves – Nylon guides – durable die-cast pistol grip – a no-slip two finger trigger – full drawn nickel-plated body – all stainless steel and brass internal parts – 80 mesh brass strainer.

Model	Std Pkg.	Wt. per Doz.
400	Individual Carton	24 lbs.
401	Individual Carton	24 lbs.

PLEWS SELECTO-LUBE SET

Know "where it is and what's in it"... save time looking for the right lube, penetrant or solvent. *COLOR KEYED* SELECTO-LUBE shows at a glance what each oiler contains!

Model	Packing	Weight
1107	Individual Carton	22 lbs. per doz.

PLEWS PISTOL OILERS

Models 965 DRS and 965 DFS have the special "O" ring and closure tip for carrying in tool boxes. Absolutely leakproof! All spouts interchangeable.

Model	Capacity	Spout Furnished	Pkg.	Tip Furnished	Shipping Weight per doz.
965 DRS	6 oz.	Detachable 5" Rigid	1 Doz.	Detachable Ledged Cone Tip	8 lbs.
965 DFS	6 oz.	Detachable 13" Flexible	1 Doz.	Detachable Closure Tip	9 lbs.
965D-12	6 oz.	12" Rigid	1	Generator Oiler	10 lbs.
970 DRS	1 pint	Detachable 5" Rigid	1	Detachable Ledged Cone Tip	12 lbs.
970 DFS	1 pint	Detachable 13" Flexible	1	Detachable Closure Tip	13 lbs.
982 DRS	1 quart	Detachable 5" Rigid	1	Special Fine Stream Nozzle	16 lbs.

PLEWS CAN SPOUTS

Made of high quality steel with sharp, hardened, long wearing cutting blades. Bright zinc lustron finish. The 12ACS has an extra long spout with tapered tip for 4 oz. to 1 qt. cans.

Model	Size	Std. Pkg.	Wgt. Per Doz.
RB1	7½"	12	6 lbs.
RB2	8½"	12	8 lbs.
12ACS	7½"	12	2¼ lbs.

PLEWS OILER, INC. 701 S. 7th Street • MINNEAPOLIS 15, MINN.

PLEWS 2200 SERIES

Rigid and Flexible Spouts

Built for a lifetime of rugged use. Nickel plated steel spouts and triggers. Special polypropylene caps impervious to all oils. Seamless steel blue lacquered bodies. When tested by engineering, pumped over 33,000 gallons of oil. Pump operated over 5,000,000 times without visible wear to any part. No. 2200 has a detachable flared base. All models except 2208 available with 7½" flexible spouts.

Model	Cap.	Std. Pkg.	Wtg. in Lbs. Per Dozen
2200	6 oz.	12	5
2200F	6 oz.	12	5
2208	10 oz.	12	4½
2210	⅞ pint	12	8
2210F*	⅞ pint	12	8½
2216	1 pint	6	9
2216F*	1 pint	6	9
2225	⅞ pint	12	8
2225F*	⅞ pint	12	8½

*Flexible spout.

PLEWS PLASTIC PISTOL OILER



Finger-tip plunger. Holds up to four ounces of lubricating oil. A choice of bright red, yellow or green finishes. (For use with lubricating oil only).

Model	Std. Pkg.	Weight Per Dozen
AP 101	12 (in reship carton)	2 lbs.

PLEWS PLASTIC GREASE GUN



Functional, trouble-free, all-purpose, as modern as push button control. Develops up to 3,000 lbs. pressure per square inch. The 3 inch straight nozzle makes easy work of those hard-to-reach grease fittings. Made of tough tenite, stands by itself. Fits hands. Packed 6 to a reship carton including display.

Model	Std. Pkg.	Weight Per Dozen
AP 202	6	7 lbs.

PLEWS HANDLED OILERS

• Nickel Plated • Fixed Spouts—Thumb Lever Action • Plews Handled Oilers with fixed spouts are specially designed for general factory, shop and farm use • Deep-drawn steel bodies • Powerful pumps, with bronze springs and steel ball valves • Ledged tips.

Model	Capacity	Fixed Spout	Finish	Package	Shipping Wt. per doz.
N-10	⅞ pint	Upright Rigid 7"	Nickel	6 to Carton	11 lbs.
N-20	⅞ pint	50° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
N-25	⅞ pint	15° Angle Rigid 7"	Nickel	6 to Carton	11 lbs.
N-3335	1 pint	Vertical 9"	Lacquered	None	10 lbs.
N-3340	1 pint	Angle 9"	Lacquered	None	10 lbs.

PLEWS 800 SERIES HANDLED OILERS

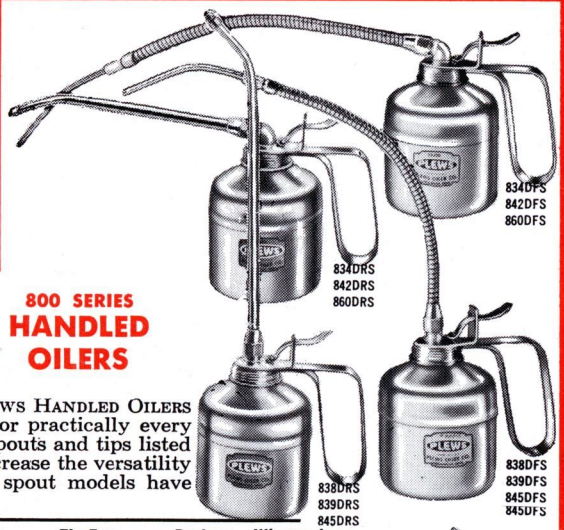

This complete line of PLEWS HANDLED OILERS gives you the right unit for practically every lubricating job. Add the spouts and tips listed in chart below and you increase the versatility of these oilers. All rigid spout models have fixed tips.

Model	Capacity	Spout Furn.	Tip Furn.	Package	Wt. per doz.
834 DRS	1 pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	12 lbs.
834 DFS	1 pt.	Horizontal Flexible 15"	Detachable Hollow-Wire	4 to Ctn.	12 lbs.
838 DRS	1 pt.	Vertical Rigid 9"	Fixed Ledged-Cone	4 to Ctn.	12 lbs.
839 DRS	1½ pt.	Vertical Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	14 lbs.
842 DRS	1½ pt.	Horizontal Rigid 9"	Fixed Ledged-Cone	3 to Ctn.	14 lbs.
845 DRS	1 qt.	Vertical Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
860 DRS	1 qt.	Horizontal Rigid 11"	Fixed Ledged-Cone	3 to Ctn.	18 lbs.
860 DFS	1 qt.	Horizontal Flexible 18"	Detachable Hollow-Wire	3 to Ctn.	19 lbs.

Detachable Rigid Spouts fitting ½-20 thread bases
9" Rigid with fixed ledged-cone tip
11" Rigid with fixed ledged-cone tip
16" Rigid without ledged-cone-tip
26" Rigid without ledged-cone tip
13" Rigid with 180° arched spout end
60" Rigid with 180° arched spout end

Detachable Flexible Spouts fitting ½-20 thread bases
15" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads
18" overall, Flexible, with detachable Flexible Hollow Wire Extension (12-32) threads

PLEWS PRODUCTS

PLEWS...*first choice* OF THE PROFESSIONAL MECHANIC

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS PRODUCTS

QUALITY STEEL BENCH OILERS

• Heavy-gauge, welded steel spouts • Knurled brass spout bushing, with machine-cut threads • Drawn seamless steel body • Bottom of special quality steel electrically welded to body. All spouts are interchangeable on all bodies • Genuine leather washers • Steel neck bushings, with machine-cut threads • Guaranteed leakproof

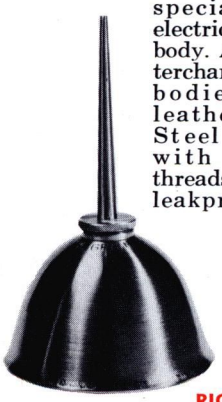

RIGID SPOUT OILERS

Gem No.	Plews No.	Trade Capacity	Size & Type Spout	Weight Per Doz.
1604	490-4	⅓ pint	4″ Straight	3¾ lbs.
1606	490-6	⅓ pint	6″ Bent	3⅞ lbs.
1609	490-9	⅓ pint	9″ Bent	4¼ lbs.
1612	490-12	⅓ pint	12″ Bent	4⅝ lbs.
1704	491-4	½ pint	4″ Straight	4½ lbs.
1706	491-6	½ pint	6″ Bent	4⅝ lbs.
1709	491-9	½ pint	9″ Bent	4⅞ lbs.
1712	491-12	½ pint	12″ Bent	5⅜ lbs.
1804	492-4	¾ pint	4″ Straight	5½ lbs.
1806	492-6	¾ pint	6″ Bent	5⅞ lbs.
1809	492-9	¾ pint	9″ Bent	6 lbs.
1812	492-12	¾ pint	12″ Bent	6¼ lbs.
1904	493-4	1 pint	4″ Straight	6¼ lbs.
1906	493-6	1 pint	6″ Bent	6⅜ lbs.
1909	493-9	1 pint	9″ Bent	6⅝ lbs.
1912	493-12	1 pint	12″ Bent	7¼ lbs.

Packed One Dozen of a Size to a Carton

SPARK PROOF OILER

This all brass unit is safe to use in the presence of inflammable materials where a steel can could represent a dangerous hazard due to the possibility of striking a spark.

Model	Trade Cap	Spout Length	Weight Per Doz.	Std. Pkg.
494-9	1 Pint	9 inches	7¼	12

FLEXIBLE SPOUT OILERS

These flexible spout oilers use the same bodies as above and give long and satisfactory service. Flexible steel tubing, ¼″ inside diameter, is used and seam is packed with asbestos lining. Base of spout is made from solid brass with machine cut threads.

Gem No.	Plews No.	Trade Capacity	Spout Length	Weight Per Doz.
1607-F	490-7½F	⅓ pint	7½″	4⅛ lbs.
1707-F	491-7½F	½ pint	7½″	4¾ lbs.
1807-F	492-7½F	¾ pint	7½″	5¾ lbs.
1907-F	493-7½F	1 pint	7½″	6¾ lbs.

Packed One Dozen to a Carton

EXTRA SPOUTS

Customarily furnished as shown. Specify "S" for straight spout or "B" for bent spout if other style is desired.

Gem No.	Plews No.	Length	Type	Wt. Doz.
215-S	504-S	4″	Straight	15 oz.
216-B	506-B	6″	Bent	1 lb., 2 oz.
217-B	509-B	9″	Bent	1 lb., 6 oz.
218-B	512-B	12″	Bent	1 lb., 13 oz.
425-F	507½-F	7½″	Flexible	1 lb., 5 oz.

CONTROLLED FEED OILERS (Series TX)

"TX" model oilers are designed for use in industries where uncontrolled oiling and dripping can damage the equipment or the material being processed. Pistol type . . . pump stroke adjustment regulates flow of oil . . . detachable welded steel spouts . . . detachable pump tubes . . . detachable strainers for easy cleaning.

Model	Capacity	Spouts	Nozzle	Feed Control	Wt. per Doz.
600 TX	6 oz.	2½″, 4″ or 7″	Steel	One Drop Clamp Type	11 lbs.
600 TX-SM	6 oz.	Special 4″ Tapered	None	One Drop Clamp Type	11 lbs.
625 TX	1 pint	2½″ or 4″	Steel	One Drop Clamp Type	13 lbs.
725 TX	1 pint	7″ or 12″	Steel	Overhead Full Stroke	13 lbs.
775 TX	1 quart	12″ or 17″	Steel	Overhead Full Stroke	16 lbs.
785 TX	1 quart	4″ for Spindle Bolster Cups	Bent	Overhead Full Stroke	15 lbs.
		24″ for Cylinder Bearings			18 lbs.

See price pages for additional spouts available for TX oilers.

SOLDERING IRONS

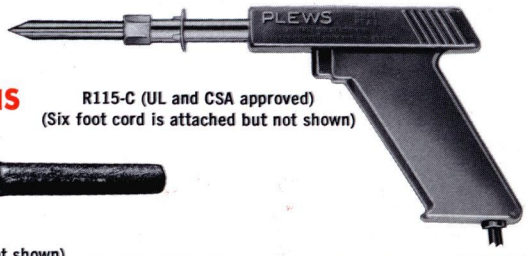

R115-C (UL and CSA approved)
(Six foot cord is attached but not shown)

SI-32 (Six foot cord is attached but not shown)

PE-33 (Six foot cord is attached but not shown)

Model	Size	Std. Pkg.	Wgt. Per Doz.
R115-C	10 ″ with 6′ cord	1	10 lbs.
SI-32	10½″ with 6′ cord	1	6½ lbs.
PE-33	7½″ with 6′ cord	1	5 lbs.

VARI-HOT PISTOL SOLDERING IRON—R115 C (with booster control for extra heat) Hermetically sealed dual heating element located entirely within the tip. Requires only 25 watts to maintain tip temperature of 530 degrees. Booster button increases power to 100 watts. Tip temperature can be controlled up to 1000 degrees F. Attached rest. Operates on 115 volts, 25-100 watts, AC-DC. Seven interchangeable iron plated tips available, which also fit SI 32.

VARI-HOT STRAIGHT IRON—SI 32. Heavy duty industrial iron. Four interchangeable heating elements provide four different operating temperatures. No. SI-32-25 550°F at 25 watts; No. SI-32-40 650°F at 40 watts; No. SI-32-55 825°F at 55 watts; No. SI-32-75 910°F at 75 watts. Heating elements located entirely in the tip. Attached rest. Operates on 115 volts, 25-75 watts, AC-DC. Seven interchangeable tips available which also fit R115-C.

VARI-HOT PENCIL IRON—PE 33. Feather weight iron ideal for high speed industrial production. Working tip temperature of over 800 degrees F. Operates on 115 volts, 18 watts, AC-DC. For interchangeable tips, available see below.

Stand Iron for sub-assembly production work available.



ADAPTER for tips R-115A-12 thru R-115A-15

EXTRA TIP SHAPES

All seven tip shapes R-115A-9 thru R-115A-15 are available for both model R-115-C and straight iron S-32. The four tip shapes R-115A-12 thru R-115A-15 are the only ones that fit pencil iron PE-33.

PLEWS OILER, INC. 701 S. 7th Street • MINNEAPOLIS 15, MINN.

PLEWS...*first choice* OF THE PROFESSIONAL MECHANIC

MANUFACTURERS OF OVER 101 LUBRICANT DISPENSERS

PLEWS HEAVY DUTY GREASE GUNS



G17 Cartridge Gun
Versatile, Heavy Duty
Spring Primed

Combination cartridge or bulk grease. Bright, zinc-plated finish, develops up to 10,000 psi, double cup two-way plunger.



G16 Bulk Only
Standard Lever
Bulk Grease Only

Bright, zinc-plated finish, spring primed, heavy duty, develops up to 10,000 psi, efficient, leak-proof, economical.

GGB

PLEWS GREASE GUN BRACKET

Easily mounted on farm machinery, wall and equipment. Fits any grease gun, suction gun, or barrel pump with standard 2¼" O.D. barrel.

Model	Std. Pkg.	Wt. per Doz.
G17	1	51 lbs.
G16	1	46 lbs.
GGB	12	4 lbs.

PLEWS BARREL PUMPS



BP16 Regular Duty

Ideal for industrial plants, farms, garages, filling stations, etc. Easy to install and operate . . . saves time . . . eliminates waste. Fits 15 to 55 gallon drums . . . heavy cast metal . . . 18 gauge heavy duty cylinder . . . 1½" O.D. Adapter threaded to fit 1½" to 2" bung hole . . . cast aluminum spout threaded to fit garden hose coupling . . . metallic piston valve for long carefree service.

BP19 Heavy Duty

Moulded nylon plunger . . . valve and seal are not affected by any non-corrosive liquids such as lacquer thinners, solvents, gasoline, anti-freeze, etc. Telescoping suction tube adjustable to 15 to 55 gallon drums . . . zinc plated . . . ⅘ of a pint per stroke . . . 1½" and 2" pipe threaded base . . . spout threaded for standard garden hose coupling.

	Std. Pkg.	Wgt. per. Doz.
BP16	2	60 lbs.
BP19	1	84 lbs.

PLEWS HEAVY DUTY SUCTION GUN



1¼ pint capacity . . . vinyl plastic flexible hose makes it easy to use in those hard-to-reach places. Will handle all oils, gas, fuel oil, kerosene and other non-corrosive fluids. Standard package of six with each gun individually packaged.

	Standard Package	Wt. per Doz.
PSG18	Individual Carton	27 lbs.

PLEWS BLOGUNS & SPRAY CLEANERS

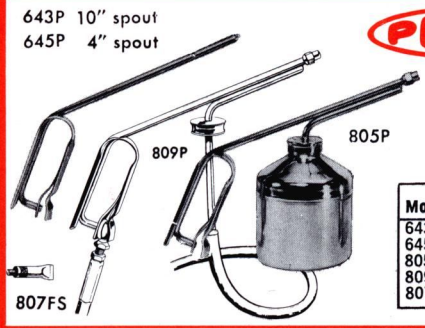

Snaps onto Schrader, Dill and most other chucks. The 809P (with a 6-foot hose) can be used with drums for cleaning or spraying larger areas.

Model	Std. Pkg.	Weight Per Doz.
643P Piston Type, 10" spout	1	7 lbs.
645P Pocket Type, 4" spout	1	5 lbs.
805P Sprayer Cleaner	1	21 lbs.
809P With 6 foot hose	1	15 lbs.
807FS Spray Tip Nozzle		

PLEWS PRODUCTS

Turn page to see new items

recently added to the

Plews line of lubricating dispensers!

PLEWS FUNNELS

Made of 28 gauge tite coat galvanized steel. No. 11 galvanized wire rolled in top. Extra bead in band for rigidity. Hand soldered.

F1

UTILITY FUNNEL

2 qt. capacity
¾" outlet.
8" diameter.
9" height.

F2

OFFSET FUNNEL

7 qt. capacity. 1¼" outlet. 8" diameter, 15" height. 60 gauge brass screen soldered in bottom.

F3

UTILITY BANDED FUNNEL

3 qt. capacity.
¾" outlet.
8" diameter.
12" height.

F4

TRACTOR FUNNEL

8 qt. capacity. 1¼" outlet, 10½" diameter, 11½" height.

F5

HEAVY DUTY TRACTOR FUNNEL

10 qt. capacity, 1¼" outlet, 12" diameter, 13½" height. 60 gauge brass screen soldered in bottom.

F8

LOCK-ON TRACTOR FUNNEL

10 qt. capacity, 1¼" outlet, 10" diameter, 10½" height. 60 gauge brass screen in bottom. Hot dipped galvanized. Heavy duty and long life.

PLEWS ECONOMY UTILITY FILLER

FT7

All purpose fluid dispenser with 17" flexible tube, 6" mouth on funnel, 4" tapered dispensing spout with ½" outside diameter for small openings. Equipped with 80 mesh screen for greater safety.

Model No.	Size	Std. Pkg.	Wgt. Per Doz.
FT7	17"	12	12 lbs.

751 **DRAIN PAN**

3½ gallon capacity. 15" diameter, 4" height. Made of galvanized steel. Full drawn bottom. No seams.

Model No.	Size	Std. Pkg.	Wgt. Per Doz.
F1	2 qt.	12	11 lbs.
F2	7 qt.	6	24 lbs.
F3	3 qt.	6	16 lbs.
F4	8 qt.	6	20 lbs.
F5	10 qt.	6	40 lbs.
F8	10 qt.	6	25 lbs.
751	3½ gal.	12	28 lbs.

AUTOMOTIVE RESALE

TERMS: F.O.B. Granite Falls, Minnesota. Full freight allowed, 150 pounds or $150.00 and over. Broken package charge 50c. $1.00 minimum billing.

Model No.	Description	Dealers & Mechanics Net Each
F1	Utility Funnel, 2 qt.	$ 1.10
RB1	Oil Spout, 7½ In.	1.05
F2	Offset Funnel, 7 qt.	2.20
RB2	Oil Spout, 8½ In.	1.20
F3	Utility Banded Funnel, 3 qt.	1.64
RBJD3	Transmission Filler	3.00
F4	Tractor Funnel, 8 qt.	2.20
F5	Heavy Duty Tractor Funnel, 10 qt.	2.55
N5P	Oil Spout, 8½ In.	1.65
N5PFS	Transmission Filler	4.50
N5PJ	Oil Spout, 7½ In.	1.35
5PJD	Transmission Filler	3.26
FT6	Funnel Type Transmission Filler	6.15
BH6	Base Holder	.15
WH6	Wall Holder	.15
BH7	Bracket for 1107 Selecto-Lube	.60
FT7	Economy Utility Filler	1.85
F8	Lock-on Tractor Funnel	2.55
N10	Oiler, ⅞ pt.	1.79
10PCS	Additive Spout	.54
12ACS	Additive Spout	.68
BP16	Barrel Pump	6.00
G16	Grease Gun (bulk only)	3.75
G17	Grease Gun (cartridge gun)	4.13
PSG18	Suction Gun	3.45
BP19	Barrel Pump	7.50
PH19	Plastic Hose for PSG-18	.75
N20	Oiler, ⅞ pt.	1.79
LA21	Lubricating Adapter Kit	8.95
LA21-1	Plug Adapter	2.33
LA21-2	Needle Point Adapter	1.34
LA21-3	Seal Off Adapter	1.16
LA21-4	Neoprene Tip for Seal-Off Adapter	.17

Model No.	Description	Dealers & Mechanics Net Each
LA21-5	Connector	$ 1.54
LA21-6	Sleeve	.64
LA21-9	Replacement Plug	.08
BB22	Brake Bleeder	29.75
BP24	Bearing Packer	3.75
N25	Oiler, ⅞ pt.	1.79
RC29	Radiator Filler, 3 gal.	3.95
TT29	Tool Tray for LD30	1.79
BF30	Battery Filler	4.25
LD30	Lift Drain	19.98
C32	Battery Carrier	1.49
SI32	Straight Iron	5.64
PE33	Pencil Iron	5.32
52	Hobby Oilshooter, 4 oz.	1.20
54	Adhesive Gun, 6 oz.	2.33
55	Adhesive Gun, 1 pt.	3.18
57	Gear Case Filler	4.65
59	Brake Fluid Dispenser	3.68
60	Brake Fluid Dispenser	4.45
61K	Applicator (for 8 oz. can)	1.58
61R	Applicator (for 8 oz. can)	1.58
62	Applicator (for 1 pt. can)	2.55
AP101	Plastic Oiler	.75
R115-C	Pistol Grip Soldering Iron	7.00
R115A-9 thru R115A-15	Interchangeable Tips for R115-C and SI32	1.01
R115A-16	Adapter for Tips R115A-12 thru R115-15	.57

Model No.	Description	Dealers & Mechanics Net Each
AP202	Plastic Grease Gun	$ 2.03
206	12 Inch Flexible Hose	1.97
400	High Pressure Oiler with Spray Tip	9.85
401	Fine Stream High Pressure Oiler	9.85
643P	Blogun, 10 In. Spout	1.32
645P	Blogun, 4 In. Spout	1.17
751	Drain Pan, 3½ gal.	1.74
805P	Sprayer, Cleaner	4.50
807FS	Fan Spray Nozzle for 805P	.75
809P	With 6 Foot Hose	4.50
834DRS- 9	Oiler, 9 In. Horizontal Rigid Spout, 1 pt.	2.25
834DFS-15	Oiler, 15 In. Horizontal Flexible Spout, 1 pt.	3.00
838DRS- 9	Oiler, 9 In. Vertical Rigid Spout, 1 pt.	2.25
838DFS-15	Oiler, 15 In. Vertical Flexible Spout, 1 pt.	3.00
839DRS- 9	Oiler, 9 In. Vertical Rigid Spout, 1½ pt.	2.43
839DFS-15	Oiler, 15 In. Vertical Flexible Spout, 1½ pt.	3.18
839DRS-16	Oiler, 16 In. Vertical Rigid Spout, 1½ pt.	2.63
842DRS- 9	Oiler, 9 In. Horizontal Rigid Spout, 1½ pt.	2.43
842DRS-16	Oiler, 16 In. Horizontal Rigid Spout, 1½ pt.	2.63
842DFS-18	Oiler, 18 In. Horizontal Flexible Spout, 1½ pt.	3.21
845DRS-11	Oiler, 11 In. Vertical Rigid Spout, 1 qt.	2.78
845DRS-16	Oiler, 16 In. Vertical Rigid Spout, 1 qt.	2.84
845DFS-18	Oiler, 18 In. Vertical Flexible Spout, 1 qt.	3.42

Model No.	Description	Dealers & Mechanics Net Each
860DRS-11	Oiler, 11 In. Horizontal Rigid Spout, 1 qt.	$ 2.78
860DRS-16	Oiler, 16 In. Horizontal Rigid Spout, 1 qt.	2.84
860DFS-18	Oiler, 18 In. Horizontal Flexible Spout, 1 qt.	3.42
	All "800" Series Spouts are Interchangeable	
N911B	Oiler with Base Holder, 6 oz.	1.80
N911W	Oiler with Wall Holder, 6 oz.	1.80
LDT930	Lift Drain with Tool Tray	21.55
965DRS-5	Tool Box Oiler, 6 oz.	2.10
965D-12	Generator Oiler	2.25
965DFS-13	Oiler, 13 In. Flex. Spout, 6 oz.	2.63
970DRS- 5	Oiler, 5 In. Rigid Spout, 1 pt.	2.88
970DFS-13	Oiler, 13 In. Flex. Spout, 1 pt.	3.41
982DRS- 5	Oiler, 5 In. Rigid Spout, 1 qt.	4.28
N1105	Oiler, 6 In. Rigid Spout, 6 oz.	1.50
N1105F	Oiler, 6½ In. Flex Spout, 6 oz.	1.88
1107	Selecto-Lube	4.65
N1125	Oiler, 6 In. Rigid Spout, 1 pt.	2.63
1334	Neoprene Tip for BF30	1.30
1334P	Plastic Tip for BF30	1.30
2200	Oiler, 5 In. Rigid Spout, 6 oz.	1.14
2200F	Oiler, 7½ In. Flex. Spout, 6 oz.	1.65
2208	Oiler, 4 In. Rigid Spout, 10 oz.	.49
2210	Oiler, 5 In. Rigid Spout, ⅞ pt.	1.50
2210F	Oiler, 7½ In. Flex. Spout, ⅞ pt.	1.95
2216	Oiler, 5 In. Rigid Spout, 1 pt.	2.13
2216F	Oiler, 7½ In. Flex. Spout, 1 pt.	2.58
2225	Oiler, 5 In. Rigid Spout, ⅞ pt.	1.50
2225F	Oiler, 7½ In. Flex. Spout, ⅞ pt.	1.95
N3335	Oiler, 9 In. Vertical Rigid Spout, 1 pt.	1.88
N3340	Oiler, 9 In. Angle Rigid Spout, 1 pt.	1.88
N3375	Discontinued—order 839DRS-9	
N3385	Discontinued—order 845DRS-11	
GGH	Grease Gun Holder	.56

PLEWS RADIATOR DRAIN PAN

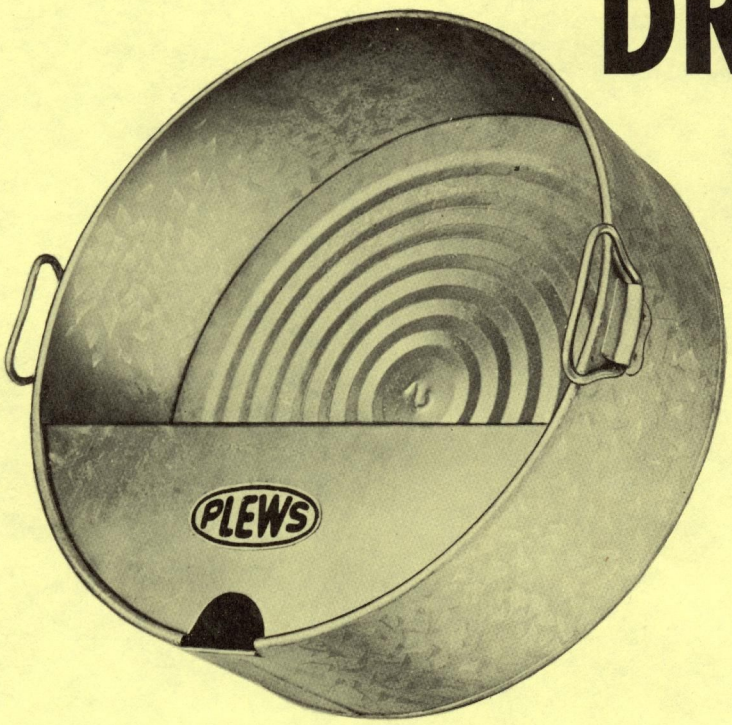

- Big 6-Gallon Capacity
- Hot Dipped Galvanized
- Side Handles
- Pouring Lip with Baffle Plate
- 19 Inches Diameter
- 6 Inches Height

Model No.	Dealer and Mechanic Net
750	$3.95

L70

First Choice OF THE PROFESSIONAL MECHANIC

PLEWS OILER, INC.
701 Seventh Street South, Minneapolis, Minn., 55415

PLEWS All New PLASTIC OIL MEASURE

Another FIRST—All Plastic Measure to add color and give longer service

- Made of tough, durable, high density polyethylene
- One quart capacity
- No seam at bottom to break and leak
- Spill-proof pouring
- Approved capacity by Bureau of Weights and Measures
- Attractive blue color
- Rigid or flexible spout

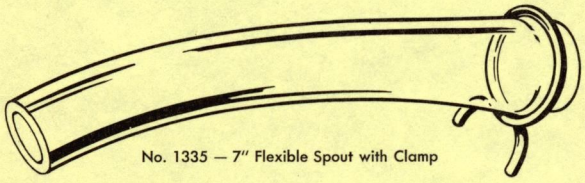

No. 1335 — 7" Flexible Spout with Clamp

Model No.	Dealer and Mechanic Net
M-1	$1.23
M-1F	2.05
1335	.82

First Choice OF THE PROFESSIONAL MECHANIC

PLEWS OILER, INC.
701 Seventh Street South, Minneapolis, Minn., 55415

L72